

Conformal Coating Inspection SERIES



- UV-Active Coating Inspection
- Intuitive Coverage Programming
- Accurate Coating Area Measurement

CONFORMAL COATING AUTOMATED
OPTICAL INSPECTION


CONFORMAL COATING INS

TRI Conformal Coating Inspection (CI) solutions combine a specialized optical design with multi-phase lighting to inspect UV-active Conformal Coatings and identify most typical coating defects.

Reveal Typical Defects

TRI's CI software easily detects most common coating issues, including cracks, bubble/voids, insufficient/excess coating and loss of adhesion.


CCI - Defect Detection in UV-active Material

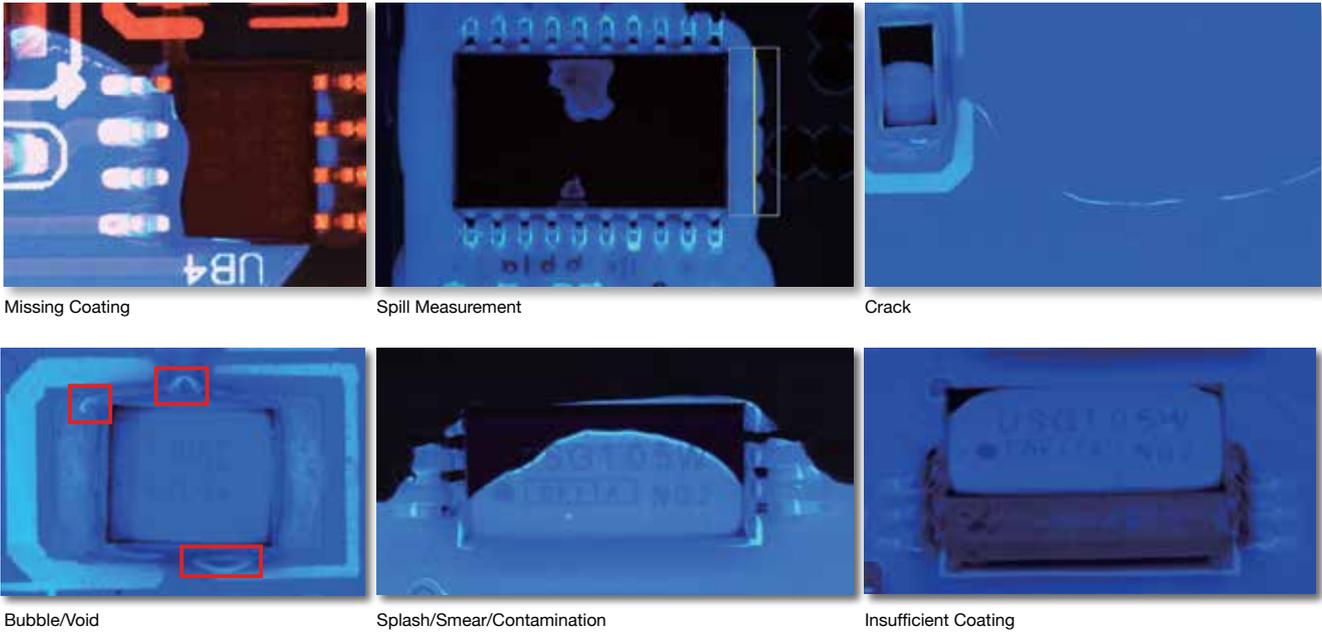

Multi-phase Lighting Design

Advanced lighting and optical design combines multiple lighting types for maximum inspection accuracy.


Multi-phase FOV Images: W/R + UV

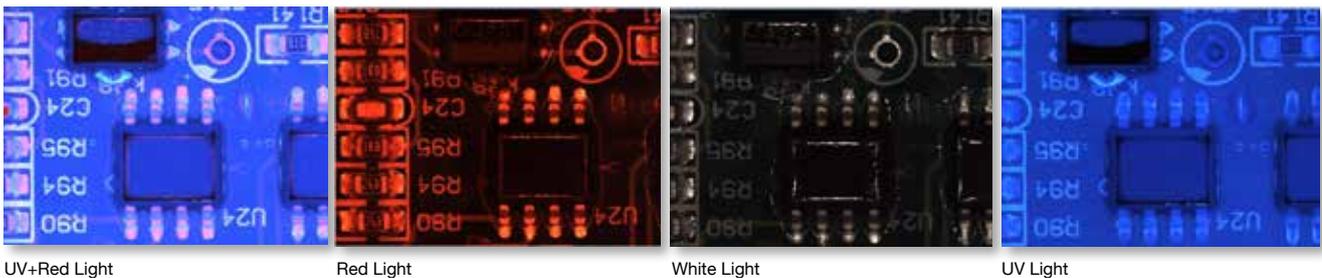

Smart Software UI

Smart software easily converts CAD data and creates coating maps for rapid deployment. Learning from sample PCBs, the system rapidly improves accuracy and reduces false calls.


Program Development Flow

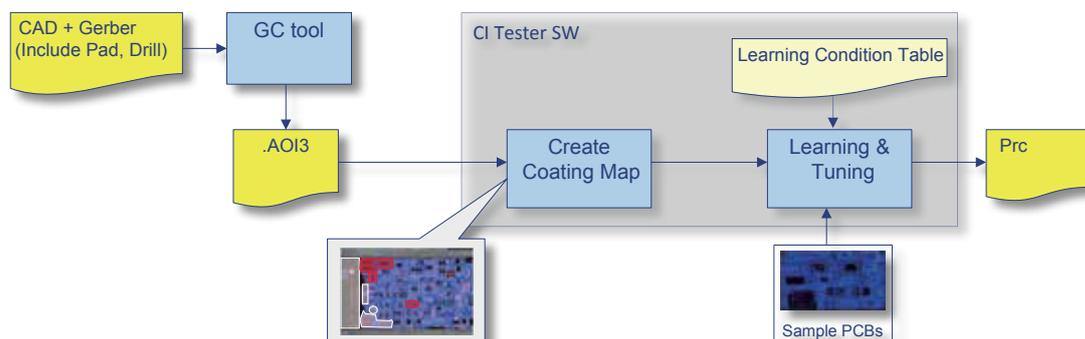

SPECTION FEATURES


User Interface

Intuitive editing tools enable "what you see is what you get" style programming of conformal coating inspection in a few simple steps.

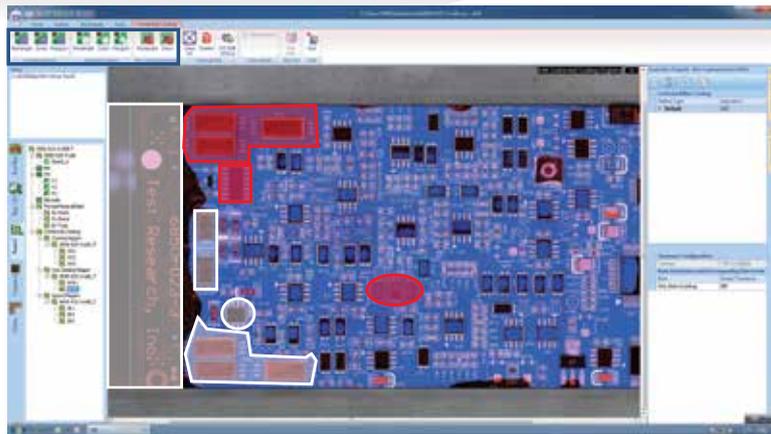

Excess Coating Measurement

Reliably measure coating distance from key areas on the PCB, and prevent undesirable coating spills near PCB connectors, sensitive components and designated mounting holes.

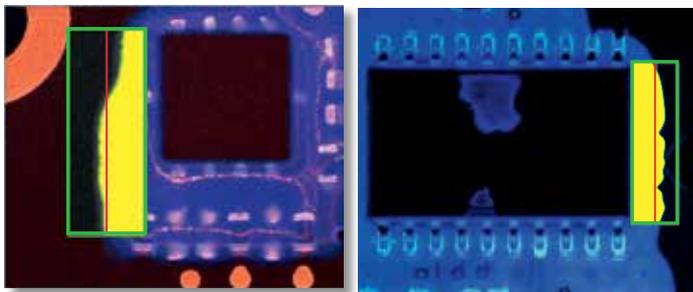

Spill Measurement

SMT Line Integration


Centralized production line management increases operator productivity and response time. TRI's integrated solution includes the following four components.

- Offline Editor


This application allows for centralized independent adjustment and fine tuning of inspection algorithms on previously scanned images while providing immediate feedback. The completed program can then be uploaded to the in-line inspection machines to improve inspection stability and accuracy.

- Yield Management System 4.0

YMS 4.0 provides real-time inspection status across SPI, AOI and AXI systems and monitors SPC and Alarm status, and supports remote fine-tune throughout the SMT line. The centralized inspection management provides top 5 to 10 defects and defective images, OEE review and management, issue and root cause drill down line by line, by station and by process, which improves quality and productivity analysis. YMS 4.0 supports Industry 4.0 initiative.

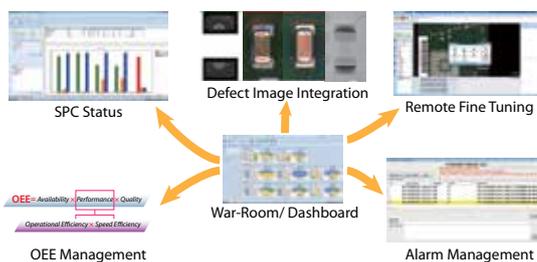

Yield Management System

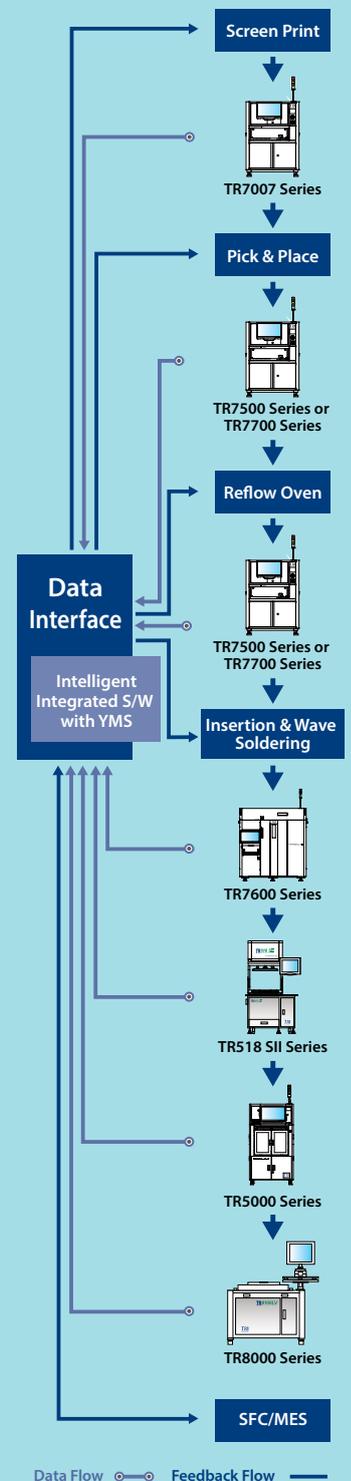

- Inspection results and data integration
- Real time SPC and production yield management
- Quality reports and closed loop tracking
- Support defect component analysis and improvements
- Knowledge Management (KM)
- Productivity and Quality Management

Optical & Imaging System

	TR7500 SIII CI	TR7700 SII Plus CI
Top View Camera	4 Mpix high speed color camera	
4 Angled View Cameras	1.3 or 6.5 Mpix (factory setting)	N/A
Lighting	Multi-phase W/R + UV	
Optical Resolution	15 µm	
Imaging Method	Dynamic Imaging	

Imaging/Inspection Speed

15 µm (cm ² /sec)	120
------------------------------	-----

Conformal Coating Inspection Functions

Missing Coating, Insufficient Coating, Crack, Bubble/Void, Splash/Smear/Contamination, Spill Measurement

Data for Programming

CAD + Gerber (include pad and drill)

X-Y Table & Control

Ballscrew + AC servo with motion controller

X-Y Axis Resolution	1 µm
---------------------	------

PCB & Conveyor System

	TR7500 SIII CI	TR7700 SII Plus CI
Min. PCB Size	50 x 50 mm (1.97 x 1.97 in.)	
Max. PCB Size	510 x 460 mm (20.1 x 18.1 in.)	
PCB Thickness	0.6 - 5 mm (0.02 - 0.23 in.)	
PCB Transport Height	880 - 920 mm (34.6 - 36.2 in.)	
Max. PCB Weight	3 kg (6.61 lbs)	
PCB Carrier/Fixing	Step motor driven & pneumatic clamping	
Clearance		
Top	50 mm (1.97 in.)	50 mm (1.97 in.)
Bottom	40 mm (1.58 in.)	40 mm (1.58 in.) [100 mm (3.94 in.) optional]
Edge	3 mm (0.12 in.) [5 mm (0.2 in.) optional]	3 mm (0.12 in.) [5 mm (0.2 in.) optional]

Dimensions

	TR7500 SIII CI	TR7700 SII Plus CI
Dimensions (W x D x H)	1100 x 1670 x 1550 mm (43.3 x 65.7 x 61.0 in.) (not including signal tower, height: 520 mm)	1000 x 1400 x 1647 mm (39.4 x 55.1 x 64.8 in.) (not including signal tower, signal tower height: 520 mm)
Weight	1030 kg (2270 lbs)	600 kg (1323 lbs)
Power Requirement	200 - 240 V, 15 A, single phase, 50/60 Hz 3 kVA	
Air Requirement	72 psi - 87 psi (5 - 6 Bar)	

Options

Barcode Scanner, Repair Station, Offline Editor, OCR, Yield Management System 4.0 (YMS 4.0), YMS Lite, Support Pin

Headquarters

7F., No.45, Dexing West Rd.,
Shilin Dist., Taipei City
11158, Taiwan
TEL: +886-2-2832-8918
FAX: +886-2-2831-0567
E-Mail: sales@tri.com.tw
http://www.tri.com.tw

Linkou, Taiwan

No.256, Huaya 2nd Rd.,
Guishan Dist., Taoyuan
County 33383, Taiwan
TEL: +886-2-2832-8918
FAX: +886-3-328-6579

Hsinchu, Taiwan

7F., No.47, Guangming 6th
Rd., Zhubei City, Hsinchu
County 30268, Taiwan
TEL: +886-2-2832-8918
FAX: +886-3-553-9786

Shenzhen, China

5F.3, Guangxia Rd., Shang-mei-lin
Area, Fu-Tian District, Shenzhen,
Guangdong, 518049, China
TEL: +86-755-83112668
FAX: +86-755-83108177
E-mail: shenzhen@cn.tri.com.tw

Suzhou, China

B Unit, Building 4, 78 Xinglin
St., Suzhou Industrial Park,
215123, China
TEL: +86-512-68250001
FAX: +86-512-68096639
E-mail: suzhou@cn.tri.com.tw

Shanghai, China

Room 6C, Building 14,
470 Guiping Rd., Xuhui Dist.,
Shanghai, 200233, China
TEL: +86-21-54270101
FAX: +86-21-64957923
E-mail: shanghai@cn.tri.com.tw

USA

1923 Hartog Drive
San Jose, CA 95131 U.S.A
TEL: +1-408-567-9898
FAX: +1-408-567-9288
E-mail: triusa@tri.com.tw

Europe

O'Brien Strasse 14
91126 Schwabach
Germany
TEL: +49-9122-631-2127
FAX: +49-9122-631-2147
E-mail: trieurope@tri.com.tw

Japan

2-9-9 Midori, Sumida-ku,
Tokyo, 130-0021 Japan
TEL: +81-3-6273-0518
FAX: +81-3-6273-0519
E-mail: trijp@tri.com.tw

Korea

No.207 Daewoo-Technopia, 768-
1 Wonsi-Dong, Danwon-Gu,
Ansan City, Gyeonggi-Do, Korea
TEL: +82-31-470-8858
FAX: +82-31-470-8859
E-mail: trikr@tri.com.tw

Malaysia

C11-1, Ground Floor, Lorong
Bayan Indah 3 Bay Avenue,
11900 Bayan Lepas Penang,
Malaysia
TEL: +604-6461171
E-mail: trimy@tri.com.tw

Specifications are subject to change without notice. Content may not be used as acceptance criteria. All trademarks are the property of their owners.

TRI 德律 TRI INNOVATION

The absence of a product or service name or logo from this list does not constitute a waiver of TRI's trademark or other intellectual property rights concerning that name or logo. All other trademarks and trade names are the property of their owners.

