

A Donaldson Company

A WORLD LEADER IN FUME EXTRACTION TECHNOLOGY



ELECTRONICS

Last Updated on 29.08.2018





High volume extraction for hand and machine soldering applications.

BOFA's V 1000 iQ high end extraction system combines extremely large filter capacity with high airflow and pressure rates, making it the ideal choice for heavy duty applications that generate large amounts of particulate and gaseous organic compounds. This unit can cater for up to 15 operators (dependent on installation) as a centralised system or can be used to extract fumes from automated soldering machines.

Performance has now been further enhanced with the inclusion of several new features including BOFA's iQ Operating System, making the new V1000 iQ one of the most advanced systems available.

The iQ system takes performance and safety parameters to a new level and ensures that maintenance, downtime and ownership costs are kept to a minimum.

More information about the Intelligent (iQ) Operating System.

Technology



Intelligent (iQ) operating system



DeepPleat DUO pre filter



HEPA filter



Automatic flow control (AFC) technology



Reverse flow air (RFA) technology



Advanced carbon filter (ACF) technology



Patented technology



ProTECT service plan



SureCHECK quality standard

Key features of the V 1000 iQ

iQ Operating System

Standard

Reverse flow air filter technology (RFA)

Standard

Automatic flow control system

Standard

High contrast display

Standard

Remote diagnostics via USB

Standard

High airflow and pressure rates

Standard

DeepPleat DUO pre filter

Standard

Real time airflow reading

Standard

'Run safe' operation

Standard

Independent filter condition monitoring, display and warnings

Standard

Contact BOFA at https://bofainternational.com/en/contact/

https://bofainternational.com/en/portal/datasheets/v-1000-iq/















Combined HEPA/Gas filter incorporating ACF technology Standard

VOC gas sensor (Volatile Organic Compound)

Optional

Filter change / System fail signal

On-board compressor

Optional

Filters with long life and low replacement cost Standard

Remote stop / start interface Optional

Interfacing with host machine Optional

Technical specification

- 1. iQ Display
- 2. On / off switch

5. Castors


6. Door hinge

10. Door latch

- 9. Motor cooling inlet
- 7. Hose inlet connection -125mm

3. Power cable

- 11. Motor cooling outlet
- 4. Signal / interface cable
- 8. Exhaust outlet
- 12. Standby button

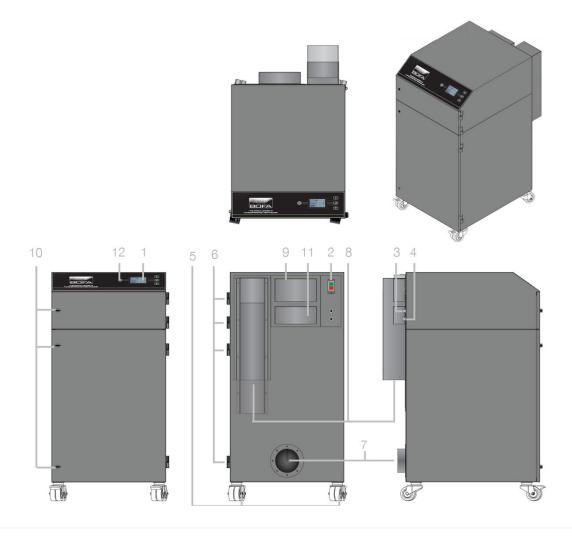

Airflow through filters

Chemical filter



HEPA filter



Pre filter




Clean air



Contaminated air



Particulate

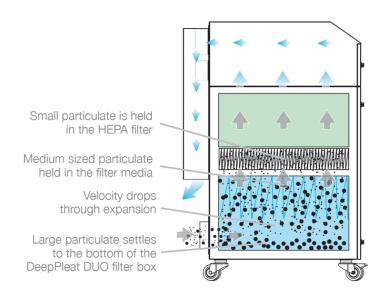

Technical data			
	EU	US	
Dimensions (HxWxD)	1205 x 615 x 790mm	47.44 x 24.21 x 31.10"	
Cabinet construction	Brushed stainless steel / Powder coated mild steel	Brushed stainless steel / Powder coated mild steel	
Airflow / Pressure	850m³/hr / 100mbar	500cfm / 100mbar	
Electrical data	230v 1ph 50/60Hz Full load current: 12.8 amps / 2.2kw	115v 60/50Hz Full load current: 19.5 amps / 2.2kw	
Noise level	< 63dBA (at typical operating speed)	< 63dBA (at typical operating speed)	
	< 58dBA - with rear silencing boxes fitted (at typical operating speed)	< 58dBA - with rear silencing boxes fitted (at typical operating speed)	
Weight	146kgs	321.88lbs	
Approvals	CE	CE, cUL, UL	

DeepPleat DUO pre filter specifications	
Surface media area	30m² approx (322.8ft²)
Filter media	Glass fibre
Filter media construction	Maxi Pleat construction with webbing spacers
Filter housing	Zintec mild steel
Filter efficiency	F8 (95% @ 0.9 microns)
Inlet size	125mm
Dropout chamber size	58 litres
Filter media pleat size	200mm

Combined HEPA/Gas filter specifications	
Surface media area	7.5m² approx (80.7 ft²)
HEPA filter media	Glass fibre
HEPA media construction	Maxi Pleat construction with webbing spacers

Combined HEPA/Gas filter specifications		
Filter housing	Zintec mild steel	
Treated activated carbon	34kgs (74.8 lbs)	
Filter efficiency	99.997% @ 0.3 microns	

Unit part numbers						
Model	Voltage	Part number	24v Stop/Start	Filter change / System failure signal	VOC monitoring	On-board compressor
V 1000 iQ Stainless steel	230v	E1272	A2001	A2002	A2003	A2007
V 1000 iQ Stainless steel	115v	E1271	A2001	A2002	A2003	A2007
V 1000 iQ Powder coated	230v	E1262	A2001	A2002	A2003	A2007
V 1000 iQ Powder coated	115v	E1261	A2001	A2002	A2003	A2007

Replacement filters part numbers		
Model	DeepPleat DUO Pre filter	Combined HEPA/Gas filter
V 1000 iQ	A1030397	A1030398

Other languages

V 1000 iQ French

Datasheet correct at time of publishing.

The carbon used in BOFA units is capable of removing a wide range of VOC's, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Think before you print! Please consider the environment before printing this document.

